


## DATA SHEET

|                                     |  |
|-------------------------------------|--|
| ○ Type.....                         | ASA 250MX-8  |
| ○ Reference standard.....           | IEC 60034-1<br>EN 60079-0<br>EN 60079-1 ; 7                      |
| ○ Rated output.....                 | 31 kW  |
| ○ Rated stator voltage.....         | 440 V Δ  |
| ○ Rated frequency.....              | 60 Hz  |
| ○ Stator current at 100% load.....  | 61 A   |
| ○ Number of poles.....              | 8  |
| ○ Rated speed.....                  | 876 rev/min  |
| ○ <b>Rated duty</b> .....           | <b>S1(continuous)</b>  |
| ○ Efficiency at 100% load.....      | 90.4%  |
| ○ Power factor at 100% load.....    | 0.76   |
| ○ Break-down torque.....            | 2.5 x Mn   |
| ○ Locked rotor torque.....          | 2.2 x Mn   |
| ○ Locked rotor current.....         | 6.2 x In   |
| ○ Rotor inertia.....                | 1.421 kgm <sup>2</sup>   |
| ○ Insulation class.....             | F  |
| ○ Direction of rotation.....        | Both(CW&CCW)   |
| ○ Protection degree.....            | IP56   |
| ○ Mounting.....                     | IM V36   |
| ○ Cooling method.....               | IC 411   |
| ○ Max. ambient temperature.....     | up to +40°C  |
| ○ Altitude.....                     | 1000m  |
| ○ Bearing type.....                 | 6316 drive end<br>6314 non drive end                             |
| ○ Lubrication.....                  | regreasable bearings with LESA 2,<br>Shell Alvania R3, SKF LGTH3 |
| ○ Relubricating interval.....       | 10700 hrs DE<br>12100 hrs NDE                                    |
| ○ Correcting interval.....          | 3700 hrs DE<br>4200 hrs NDE                                      |
| ○ Grease quantity .....             | 33g/bearing DE<br>26 g/bearing NDE                               |
| ○ Thermal winding protection.....   | 3xPTC150grd  |
| ○ Heating resistance.....           | 1x100Wx230V  |
| ○ Weight.....                       | 570 Kg   |
| ○ Outline drawing.....              | Page 2   |
| ○ Vibration level :                 | A(acc.IEC 60034-14)  |
| ○ <b>Noise pressure level</b> ..... | <b>69dB(A)</b>   |
| ○ Cable entries.....                | 2xM63x1.5  |
| ○ Additional cable entries.....     | 2xM20x1.5  |
| ○ Climate execution .....           | Normal   |
| ○ <b>Preliminary values</b> .....   | <b>Calculation</b>   |

**The overall and mounting dimensions  
IM 2031**

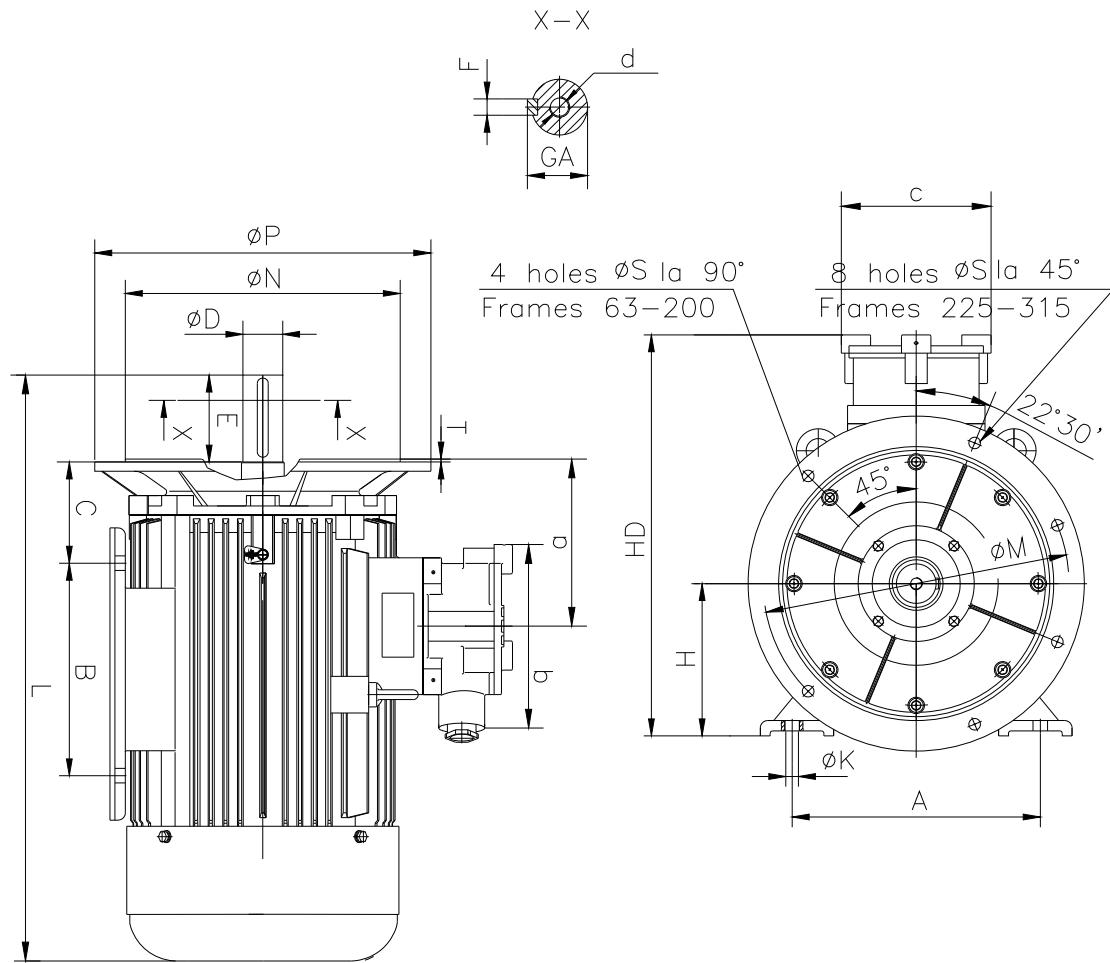

| Frame size | Dimensions (mm) |     |     |                   |    |                 |     |     |      |   |                 |     |      |    |     |     |                  |     |     |     |
|------------|-----------------|-----|-----|-------------------|----|-----------------|-----|-----|------|---|-----------------|-----|------|----|-----|-----|------------------|-----|-----|-----|
|            | Foot mounting   |     |     |                   |    | Flange mounting |     |     |      |   | Shaft extension |     |      |    |     | HD  | L <sub>max</sub> | a   | b   | c   |
| 250 MX-8   | A               | B   | C   | H <sub>-0,5</sub> | K  | N               | M   | P   | S    | T | D               | E   | F    | GA | d   |     |                  |     |     |     |
|            | 406             | 349 | 168 | 250               | 24 | 450j6           | 500 | 550 | 18.5 | 5 | 65m6            | 140 | 18h9 | 69 | M20 | 730 | 1130             | 280 | 340 | 300 |