


DATA SHEET


○ Type.....	ASA 315MX-2
○ Reference standard.....	IEC 60034-1 EN 60079-0 EN 60079-1 EN 60079-7
○ Rated output.....	160 kW
○ Rated stator voltage.....	400 V
○ Stator current at 100% load.....	271 A
○ Rated frequency.....	50 Hz
○ Number of poles.....	2
○ Rated speed.....	2975 rev/min
○ Efficiency at 100% load.....	94.8%
○ Power factor at 100% load.....	0.9
○ Break-down torque.....	2.4 x Mn
○ Locked rotor torque.....	2.3 x Mn
○ Locked rotor current.....	7.5 x In
○ Rotor inertia.....	1.932 kgm ²
○ Insulation class.....	F
○ Direction of rotation.....	Both(CW&CCW)
○ Protection degree.....	≥IP55
○ Mounting.....	IM
○ Cooling method.....	IC 411
○ Max. ambient temperature.....	+40°C
○ Altitude.....	1000m
○ Bearing type.....	6316 drive end 6316 non drive end
○ Lubrication.....	regreasable bearings with UNIREX N2, Shell Alvania R3, SKF LGTH3 or similar
○ Relubricated interval	3700 hrs DE and NDE
○ Corrected interval.....	2000 hrs DE and NDE
○ Grease quantity	33g/bearing DE and NDE
○ Weight.....	1170 Kg
○ Outline drawing.....	Page 2
○ Vibration level :	A(acc.IEC 60034-14)
○ Noise level	acc.IEC 60034-9
○ Cable entries.....	2xM63x1.5
○ Additional cable entries.....	1xM20x1.5
○ Climate execution	N

**The overall and mounting dimensions
IM 1001**

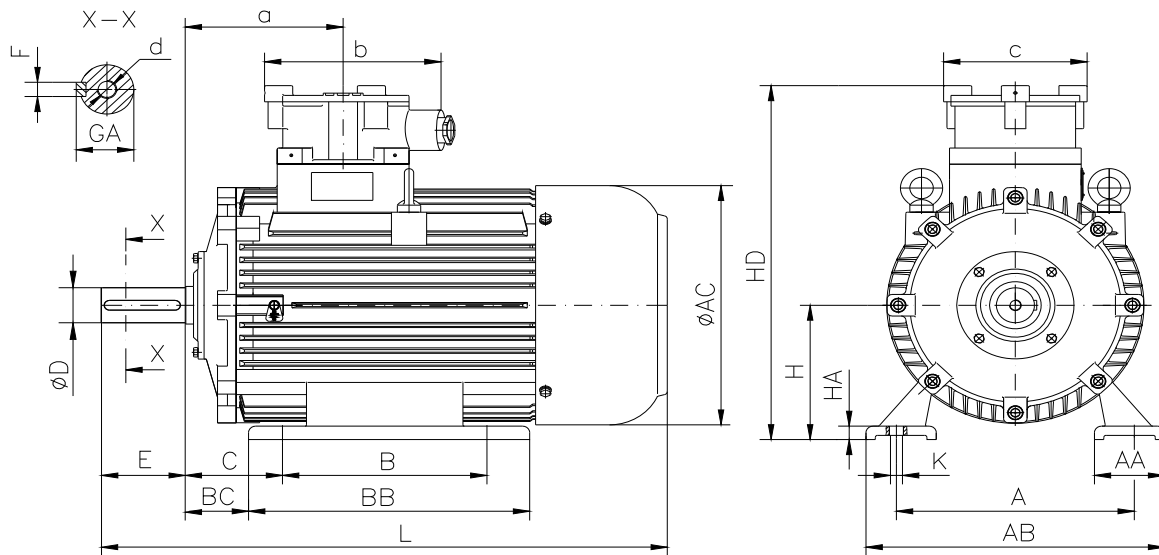


Frame size	Dimensions (mm)																				
	Foot mounting										Shaft extension					HD	AC	L	a	b	c
315 MX-2	A	B	C	H _{0.5}	K	AA	AB	BB	BC	HA	D	E	F	GA	d						
	508	457	216	315	28	120	630	588	176	26	65m6	140	18h9	69	M20	880	620	1230	320	360	355

**The overall and mounting dimensions
IM 3001; IM 3011**

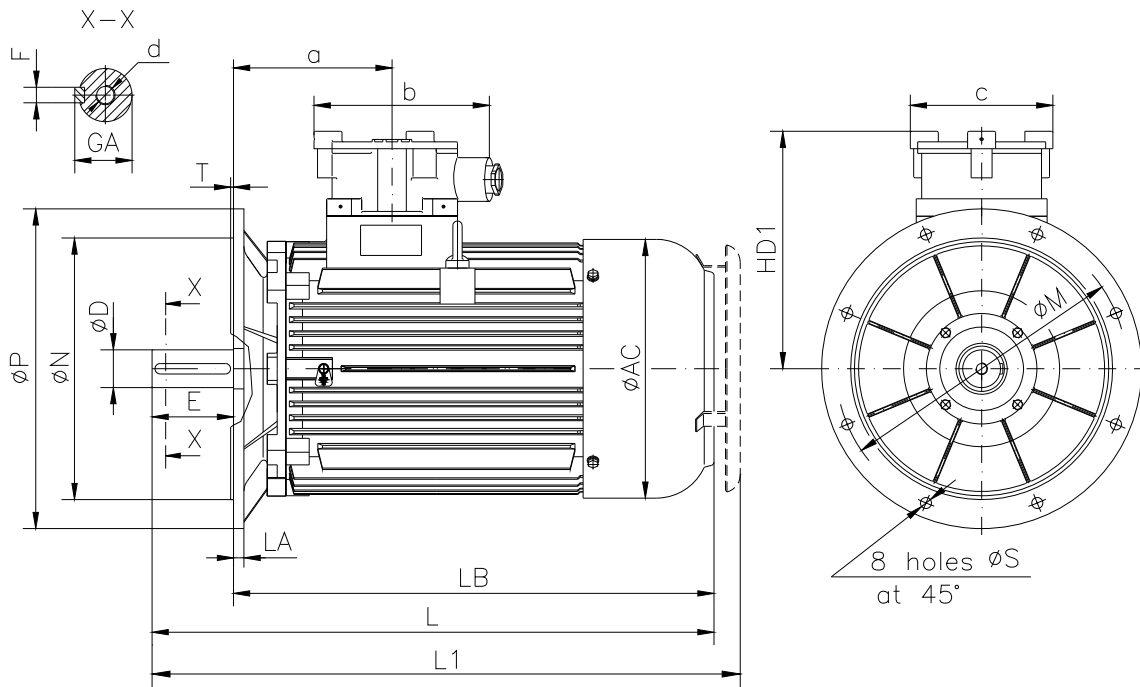

Frame size	Dimensions (mm)																			
	Flange mounting (B5)					Shaft extension						HD1	AC	LA	LB	L	L1	a	b	c
N	M	P	S	T	D	E	F	GA	d											
315 MX-2	550j6	600	660	24	6	65m6	140	18h9	69	M20	565	620	25	1080	1230	1330	320	360	355	

**The overall and mounting dimensions
IM 2001**

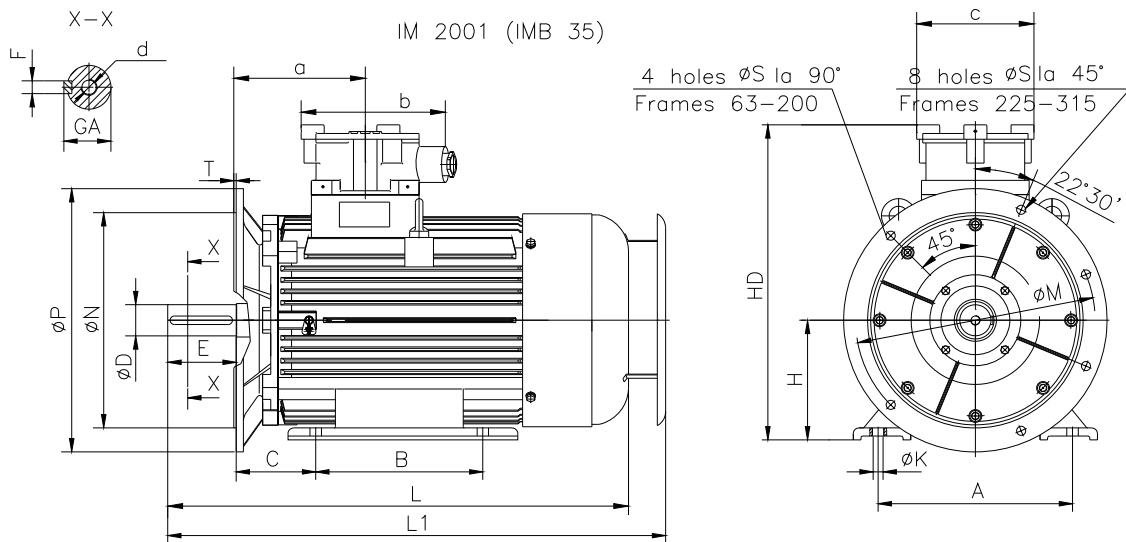

Frame size	Dimensions (mm)																				
	Foot mounting					Flange mounting					Shaft extension					HD	L	L1	a	b	c
315 MX-2	A	B	C	H _{0.5}	K	N	M	P	S	T	D	E	F	GA	d						
	508	457	216	315	28	550j6	600	660	24	6	65m6	140	18h9	69	M20	880	1230	1320	320	460	355